


DRI-SUMP® CONTAINMENT TESTING



FIND LEAKS IN ALL TYPES OF SUMPS AND SPILL BUCKETS IN JUST 60 SECONDS.

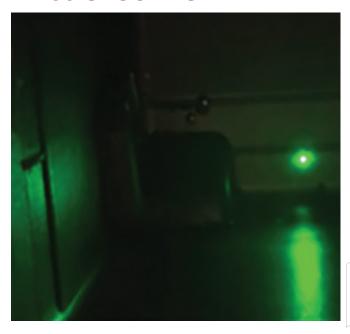

INDUSTRY EXPERTS

Dri-sump® uses lasers and aerosol fog to find leaks in all types of sumps and spill buckets. It's an EPA-approved containment-tightness testing technology that delivers digitally recorded pinpoint testing accuracy to 0.05 gph in just 60 seconds.

In partnership with



LEIGHTON O'BRIEN

BENEFITS OF DRI-SUMP® TESTING

- Certified test time 1 minute versus 60 minutes for hydrostatic testing.
- Increase sales uptime by up to 5 hours per site.
- No waste, no water disposal.
- Will pinpoint a leak in the containment area when the leak is detected.
- Increase number of containment tests per day.
- The only test that can be conducted in frozen soils, high water table conditions and any backfill soil type.
- Regulatory acceptance as an alternative to costly hydrostatic testing.
- Vapor aerosol made from pH neutral, non-petroleum based chemicals, dissipates in 10 minutes.

Step 1 Install the VST (Vapor Stimulator Tube)	Step 2 Hook up the hoses to VSTs	Step 3 Inject the Dri-Sump® heavy fog and draw a vacuum to viewing chamber	Step 4 Laser examination for 60 seconds in the view chamber	Step 5 Pass or fail result	Step 6 Test results are uploaded to the cloud & analysed for accuracy	Step 7 Digital report issued to the customer
				LASER DOT = PASS LASER LINE = FAIL		The state of the s

CALL TODAY TO SET UP TESTING.

Jennifer Repp at 515-261-7759 or jrepp@senecaco.com.



The Complete Solution

Des Moines // Corporate Headquarters
4140 E. 14th St. // Des Moines, IA 50313
800-369-5500 // 515-261-1122 // info@senecaco.com

senecaco.com